

**PETRO-LUBRICANT TESTING LABORATORIES, INC.**

---

Member A.S.T.M.

116 Sunset Inn Road  
PO Box 300 Lafayette, N.J. 07848  
fax 973-579-9447  
phone 973-579-3448

December 29, 2014

Test Report 14071623b

Dynatec, LLC

ATTN: Mr. John Roberts

RE: Your sample of July 16, 2014

Final Report

Dear Sir,


Analysis of your sample has been completed. The results are as follows:

**SAMPLE: Formula Shell SAE 10W-30 (Neat)**  
**Lab# 14071622**

<u>TEST METHOD</u>	<u>DESCRIPTION</u>	<u>RESULTS</u>	
ASTM D3233 A	Falex Test Procedure A, 4500 lb Gauge, Pre-Heat to 120°F		
	<u>Break -In Load, Lbs.</u>	<u>Starting Torque</u>	<u>Final Torque</u>
	300 lbs @ 5 min	9 lb-in	9 lb-in
	<u>Load, Lbs.</u>	<u>Observed Torque</u>	
	500 lbs	13 lb-in	
	750 lbs	20 lb-in	
	1000 lbs	28 lb-in	
	Upon reaching 1,050 lb load steel pin sheared		

Please call if you have any questions regarding this report.

Respectfully submitted,

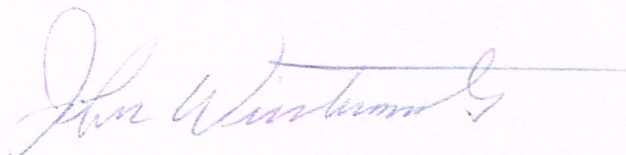

John Wintermute  
Technical Director

JW:sh