


## Dynatec, LLC

SAMPLE: 5.88% MPG+ (Lab# 17082824) blended with  
94.12% formula Shell SAE 10W-30 (Lab # 17050115) by weight  
Four Ball Wear With Coefficient of Friction

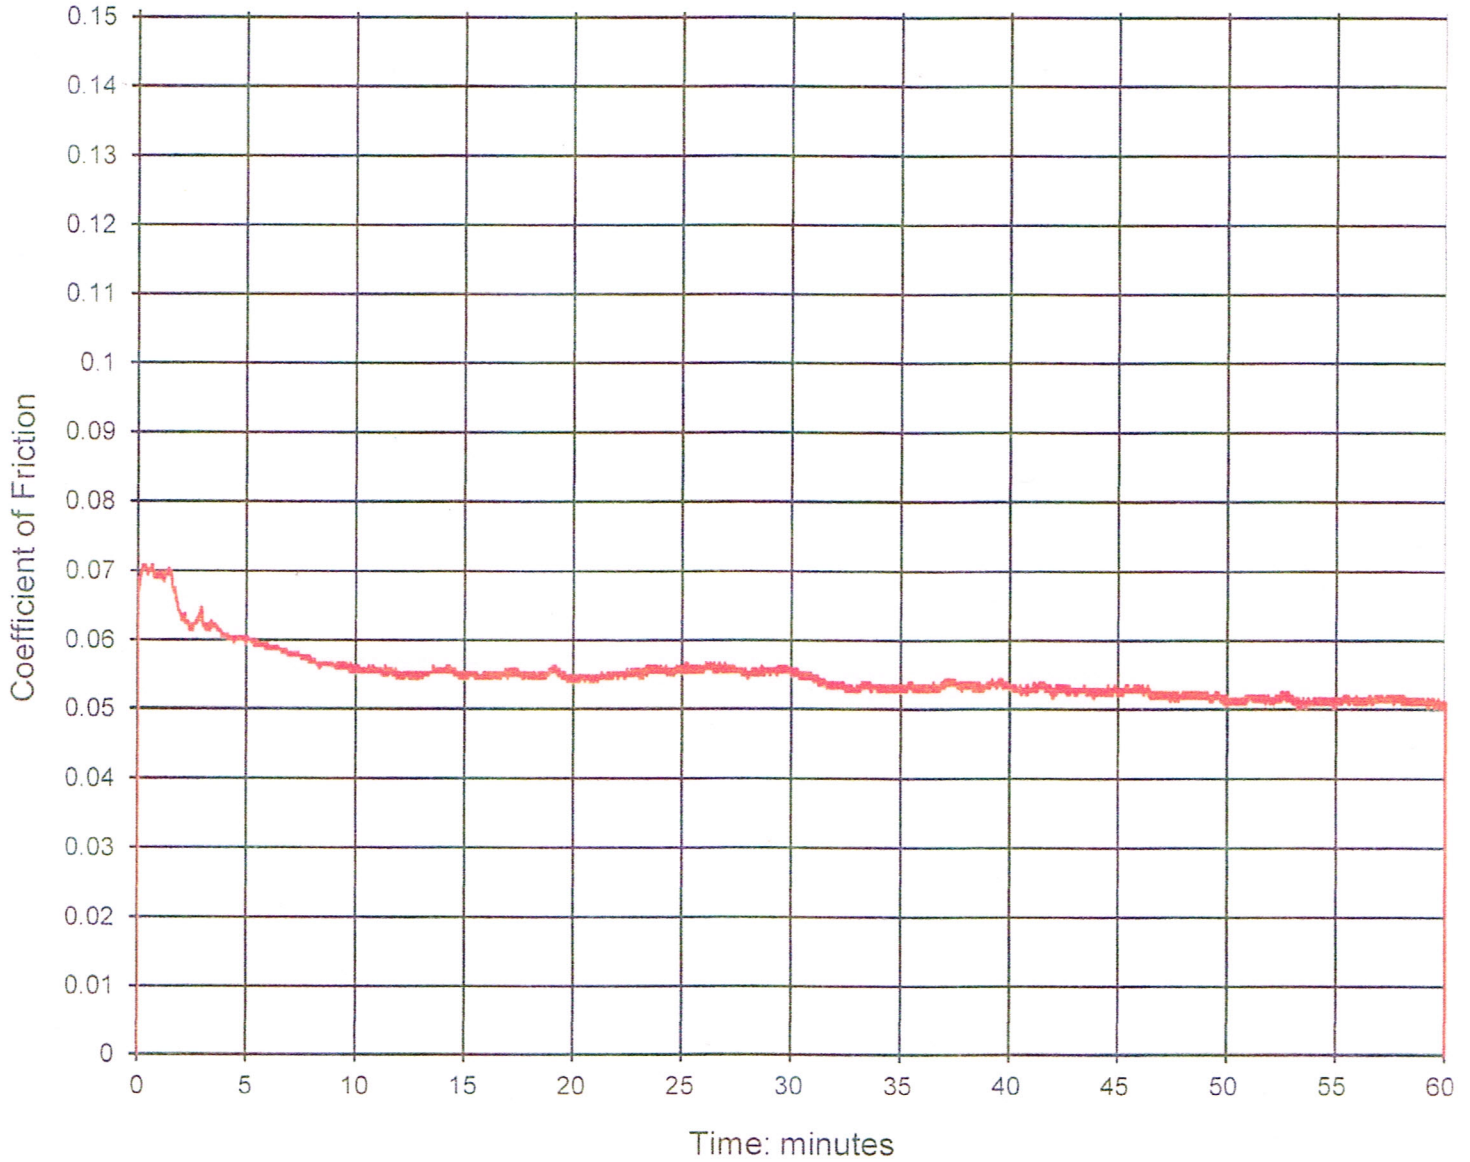

Method ASTM D4172 1200 RPM, 40 kg Load, 1 Hour @ 75°C  
Wear Scar = 0.53 mm Grand Average = 0.055 Y-O Intercept = 0.060